



Dingli
Australia

www.dingliaustralia.com.au





Summit
S0808EH

ELECTRIC SCISSOR LIFTS

Summit

S0808EH

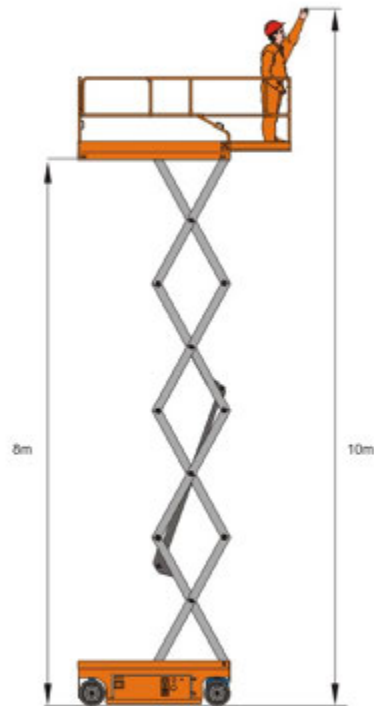

S.W.L	230kg/507lb
S.W.L on extension	113kg/249lb
Maximum workers number	2



Working height	10.0m/32ft9in
Platform floor height	8.0m/26ft3in



Overall length	2.48m/8ft1in
Overall width	0.81m/2ft7in
Overall height(Rails up)	2.34m/7ft8in
Overall height(Rails down)	1.88m/6ft2in
Platform size	2.27mx0.81m/7ft5inx2ft7in
Platform extension size	0.9m/2ft11in
Ground clearance(Stowed)	0.1m/4in
Ground clearance(Raised)	0.019m/0.7in
Wheelbase	1.87m/6ft1in
Turning radius(Inside)	0m
Turning radius(Outside)	2.19m/7ft2in



Lifting motor	24V/3kw
----------------------	---------



Travel speed(Stowed)	3.5km/h 2miles/h
Travel speed(Raised)	0.8km/h 0.5miles/h
Up/Down speed	22/40 sec
Wind Rated	12.5m/s



Batteries	4x6V/185Ah
Integrated charger	24V/25A



Gradeability	25%
Maximum working slope	2-3°



Tyres	Φ381x127mm
--------------	------------



Weight	2100kg/4630lb
---------------	---------------

Standard Equipment

- Proportional Controls
- Automatic Pothole Protection
- Self-lock Gate On Platform
- Drivable At Full Height
- Non-marking Tyres
- 2WD
- Automatic Brakes
- Emergency Lowering System
- Emergency Stop Buttons
- Cylinder Holding Valve
- Onboard Diagnostic System
- Tilt Sensor With Alarm
- All Motion Alarm
- Overload Sensor With Alarm

- Horn
- Hour Meter
- Safety Brackets
- Forklift Pockets
- Folding Guardrails
- Extended Platform
- Charger Protection
- AC Power To The Platform
- Flashing Beacon

Options

- Platform Work Lights
- Airline To The Platform

Please Note:-
All information contained in this publication was correct at time of printing but may be subject to change without notice.

